


CIRCUIT

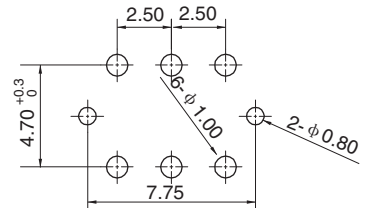

P.C.B. LAYOUT

主要技术参数、性能

The Main Thchnology Performance

额定电流、电压 Rate voltage current	12V DC,50mA
接触电阻 Contact resistance	≤100mΩ . MAX
操作力 Operating force	180 ± 50 gf for 250 ± 50 gf
耐焊规格 Solder Specifications	260°C for 3 Seconds
绝缘电阻 insulated resistance	≥100mΩ . MIN
寿命 Endurance	200,000 cycles
使用温度 Service temperature	-20°C to 70 °C
总行程 TOTAL TRAVEL	0.25±0.1mm

E				
D				
C				
B				
A				
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QYT	表面处理/颜色 FINSH/COLOR

						第一视角 FIRST VIEW		名称/NAME: 带灯开关 ILLUMINATED TACT SWITCH SERIES	
						一般公差 GENERAL TOLERANCE		型号/MODEL: PB08L	
标记 SING	处数 FREQUENCY	更改文件号 REVISION	签名 APPROVED	日期 DATE	标尺 SCALE	单位 UNIT	重量 WELGHT	0.5~2	±0.10
设计 DESIGN		Zhaoming			mm			2~5	±0.15
审核 CHECKED		Zengyong						5~10	±0.20
批准 APPROVED		Fuyunfeng						角度 ANGLE	±0.5°

